



GNSS RECEIVER

DELTA S-3S



874 GNSS channels of this receiver allow tracking all current and future satellite signals. The DeltaS-3S receiver is the only all-in-view receiver in the market to track and decode the QZSS L6 (both L61 and L62) signal messages. We offer highly stable digital filters (band characteristics do not change with age, input voltages, or temperature), improved GLONASS inter-channel bias performance (due to our flat digital filter shape), excellent new multipath rejection technique, the best. The embedded calibrator measures phase and code delays of each signal of each band. External calibration is not required.

DeltaS-3S is a powerful and reliable receiver for high-precision navigation systems, including high dynamics systems, machine and traffic control, and high-precision surveying and geodynamics and aerogeophysics applications.

DeltaS-3S can operate as a receiver for post-processing, as a Continuously Operating Reference Station (CORS) or portable base station for Real-time Kinematic (RTK) applications, and as a scientific station collecting information for special studies, such as ionosphere monitoring and the like.

DATA SHEET

VERSION 1.1 JUNE 1, 2021

Specifications

TRACKING FEATURES

- GPS C/A, L1C(P+D) including TMBOC(6,1,4/33), P1, P2, L2C(L+M), L5(I+Q)
- GLONASS C/A, P1, P2, L2C, L3(I+Q)
- Galileo E1(B+C) including CBOC(6,1,1/11), E5A(I+Q), E5B(I+Q), AltBoc, E6(B+C)
- QZSS C/A, L1C(P+D) including TMBOC(6,1,4/33), L2C(L+M), L5(I+Q), L6(L61/L62), L1S, L1Sb, L5S
- BeiDou B1, B1C(P+D) including TMBOC(6,1,4/33), B2B(I+Q), B2, B2A(I+Q), AltBoc, B3
- L-band: 1525-1560 MHz
- SBAS¹ L1, L5(P+D)
- IRNSS L5, S
- In-Band Interference Rejection
- Spoofing detection
- Advanced Multipath Reduction
- Fast acquisition channels
- High accuracy velocity measurement

PERFORMANCE SPECIFICATIONS

- Autonomous: < 2 m
- Static, Fast Static Accuracy:
Horizontal: $0.3 \text{ cm} + 0.1 \text{ ppm} * \text{base_line_length}^2$
Vertical: $0.35 \text{ cm} + 0.4 \text{ ppm} * \text{base_line_length}$
- Kinematic Accuracy:
Horizontal: $1 \text{ cm} + 1 \text{ ppm} * \text{base_line_length}$
Vertical: $1.5 \text{ cm} + 1 \text{ ppm} * \text{base_line_length}$
- RTK (OTF) Accuracy:
Horizontal: $1 \text{ cm} + 1 \text{ ppm} * \text{base_line_length}$
Vertical: $1.5 \text{ cm} + 1 \text{ ppm} * \text{base_line_length}$
- DGPS Accuracy:
< 0.25 m post processing;
< 0.5 m real-time
- Real-time heading accuracy:
 $0.004/L$ [rad] RMS, where L is the antenna separation in [m]
- Cold/Warm Start/ Reacquisition
< 35 seconds / < 5 seconds / < 1 second

DATA STORAGE

- Up to 64 GB of onboard non-removable memory for data storage

INPUT/OUTPUT

- High-speed RS232 serial ports (up to 460.8 Kbps) 7 pins ODU
- High speed configurable RS232/RS422 serial port (up to 460.8 Kbps) 7 pin ODU
- High-speed configurable RS232/RS422 serial port (up to 460.8 Kbps) and CAN 2.0 M12, 8 pins

- High speed USB 2.0 dual-role port (device or host), 5 pin ODU
- Full-duplex 10BASE-T/100BASE-TX Ethernet port 7 pin ODU
- IRIG timecode output A134, A137, B124, B137, BNC
- Two 1 PPS outputs, BNC
Synchronized to UTC or any selected satellite system time.
Voltage level: $V_{oh} > 1.8V$ at 50 Ohm load
Output Impedance: 25 to 30 Ohm (typ)
- Two Event Marker inputs, BNC
- External Reference Frequency Input/Output, BNC
- The central pin of the RF antenna connector outputs +5 VDC to power LNA. The sourced current is 0.12A max.
- Serial port (M12) bus power, +12 V DC, 250 mA max
- Two LEDs, two function keys (TriPad)
- Wi-Fi 5 GHz and 2.4GHz 802.11 a/b/g/n/ac
- Bluetooth 5.1 dual-mode device that is optimized for low-power devices
- WLAN/Bluetooth coexistence protocol support

POWER SPECIFICATION

- Two external power inputs, 5 pins ODU
- Power consumption: 4.5 Watt
- Input voltage: +4.5 to +40 Volts

PHYSICAL & ENVIRONMENTAL

- RF antenna connector: TNC
- Temperature:
Operating: -40 °F to 167 °F (-40 °C to +75 °C)
Storage: -40 °F to 185 °F (-40 °C to +85 °C)
- Enclosure:
aluminum extrusion, waterproof IP 67
- Humidity: 95%
- Shock complies with MIL-STD- 810H (method 514.8)
- Vibration complies with MIL-STD- 810H (method 516.8)
- Dimensions: 5.2 x 2.4 x 7.48 inches (132 x 61 x 190 mm)
- Weight: 1.65 lbs (750 g)

¹ US WAAS, European EGNOS, Russian SDCM, Indian GAGAN, Japanese MSAS, and similar future satellite systems

² For good observation conditions and proper length of observation session

DELTA-3S


Data Features

- Up to 100 Hz update rate for real time position and raw data (code and carrier)
- 10 cm code phase and 1 mm carrier phase precision
- Hardware Viterbi decoder
- Hardware Reed-Solomon and LDPC decoders
- Spectrum data output
- In-band Interference Rejection
- Spoofing detection
- Jamming detection
- Advanced Multipath Reduction
- GLONASS .2mm Dynamic Calibration
- RAIM
- RTCM SC104 versions 2.x and 3.x Input/Output
- NMEA 0183 versions 2.x and 3.0 Output
- RINEX / BINEX data output
- Hatanaka, zip output
- Code Differential Rover/Base
- Real Time Postprocessed Kinematics (RTPK)
- Heading / Attitude Determination
- Geoid and Magnetic Variation models
- Different DATUMs support
- Output of grid coordinates
- In-built HTTP interface
- IEEE 1588 protocol support

Network Features

- The number and type of configurable servers:
 - TCP - 5 connections
 - TCPO - unlimited connections
 - UDP - unlimited (connectionless)
 - PTP - unlimited (connectionless)
 - NTP - unlimited (connectionless)
 - HTTP(S) - 2 connections
 - FTP - 1 connection
 - DHCP - unlimited connections
 - NTRIP caster - unlimited connections³
- The number and type of configurable clients:
 - TCP - 9 connections
 - NTRIP client - 9 connections
 - NTRIP server - 9 connections⁴
 - SISNET - 9 connections
 - DynDNS - 1 connection
 - DHCP - 1 connection
 - DNS - unlimited connections
 - FTP push - 1 connection
 - SFTP push - 1 connection

Dimensions

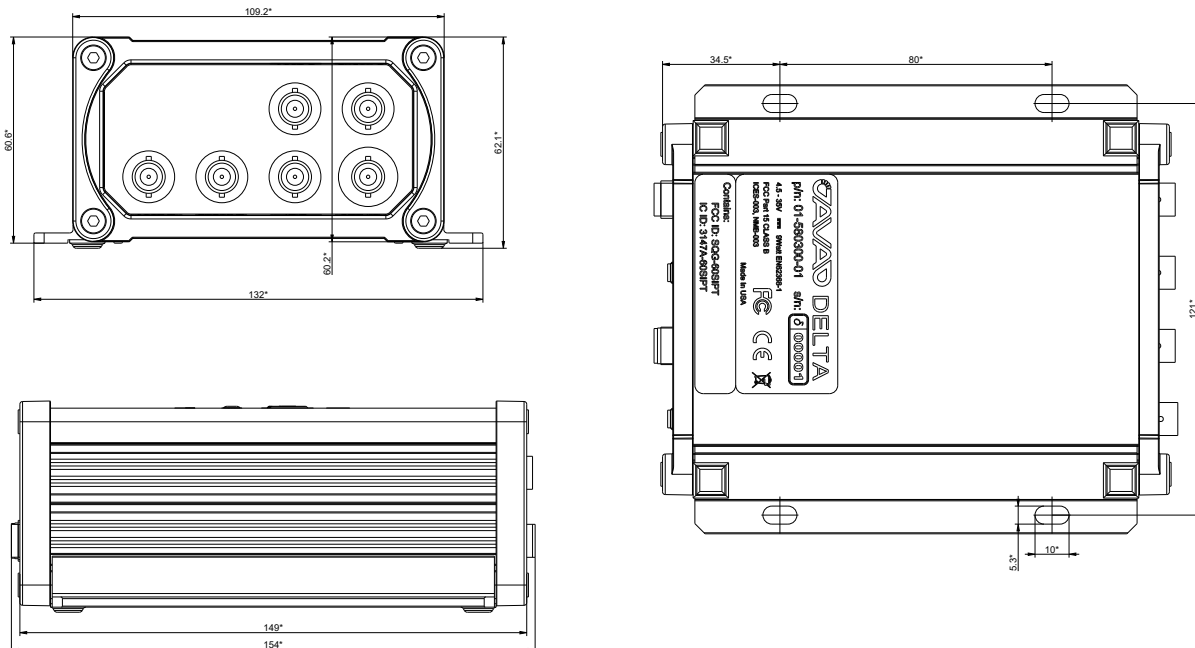

⁴ Li-Ion batteries are the temperature limiting factor

³ Integrated NTRIP caster supporting 5 mount points for sending RTCM 3.x data streams via NTRIP protocol (NTRIP 1.0 and NTRIP 2.0) to unlimited Clients simultaneously to allow real-time applications.

⁴ Integrated NTRIP server for sending RTCM 3.x data streams via NTRIP protocol (NTRIP 1.0 and NTRIP 2.0) to at least 9 NTRIP casters.

DELTA S-3S

Options



For all modifications, the front panel interfaces:

TOP LINE:

- PWR (main)
- PWR 2 (secondary)
- USB
- Serial Port A
- Serial Port C
- Ethernet

BOTTOM LINE:

- Bluetooth antenna
- Serial Port D / CAN / Power Out
- Wi-Fi Antenna
- GNSS antenna



OPTION A - REFERENCE STATION

- Back panel: empty

OPTION C - MOBILE APPLICATIONS

- Back panel:

TOP LINE:

- 1PPS B
- Event B

BOTTOM LINE:

- 1PPS A
- EVENT A
- IRIG
- EXT. FREQ. I/O

Easy management with NetView&Modem

NetView&Modem is a free application allowing the user to easily control JAVAD GNSS DeltaS-3S receivers, i.e. allowing efficiently managing receiver parameters and commands via a user friendly graphical interface.



900 Rock Avenue
San Jose
CA 95131, USA

+1(408)770-1770
sales@javad.com
www.javad.com